

instructions for use

GAZEBO AND ROMAN SUN STRIPS OF HDPE MATERIAL

- The strip is used to shade the specific place and should be used as intended.
- When the summer season ends, the strips need to be uninstalled, cleaned, dried and stored in a dry place (the fabric can be washed by hand with a sponge and soap with neutral pH or with a garden hose kept at a distance of approx. 0.5 m from the fabric, without using any aggressive detergents).
- The strips are made of 100% HDPE - polyethylene material with high density and 285 g/m² grammage. Owing to a special weave, they give 95% shade and let excess water through.
- The material can discolour up to 8% per year.
- Snap rings placed on opposite sides are used for installation. Strips can also be installed depending on the aesthetic concept of the site of fitting. Please remember that any residual water on the surface of strips is unacceptable. In case of heavy rain or hail, the fabric may not be able to drain all the water on an ongoing basis.
- The strips are not a maintenance-free product. They cannot be exposed to strong wind and should be disassembled, especially when their surface is large.
- The strip must be inspected for damage regularly. A damaged strip cannot be used until it is repaired.
- It is unacceptable for any objects to be placed on the surface of strips. They need to be removed immediately because they might fall down on a random place.
- The strip should be fitted in a place that allows it for drying up completely or being dried during use. If the strip is interlaced through the structure's crossbeams, one has to bear in mind that the fabric may become more dirty in the place of contact between the strip and the beams.

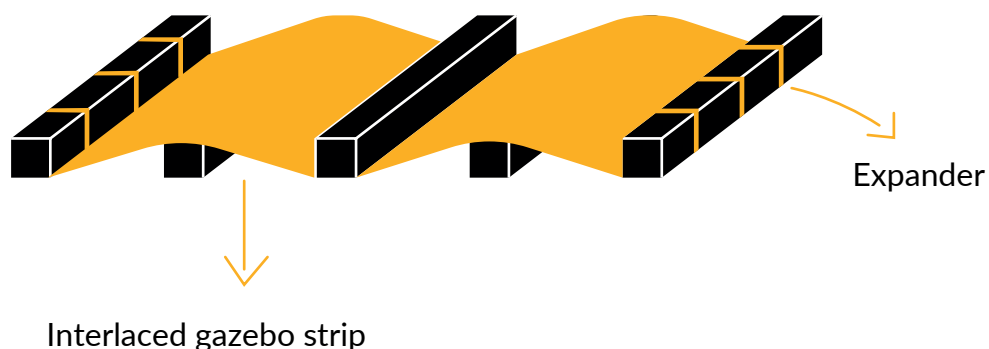


Figure 2. Proposed way of strip installation.



SCAN THE QR CODE and WATCH
THE INSTRUCTIONAL VIDEO ON



instructions for use


GAZEBO AND ROMAN SUN STRIPS OF HDPE MATERIAL

SUGGESTION FOR INSTALLATION:

1. Unfold the strips flat with the front side facing up, under place point where they are to be hung.
2. Interlace through the beams as showed in Figure 1 (interlace successive strips next to each other, starting alternately at the top and bottom of the beam).
3. Fasten the ends of the strips to the structure using snap rings (see the instructional video).
4. If the strip tension is too low – change the positions of the mounting points and start the procedure from the very beginning.

Purchase the installation kit!

sample installation kits include:

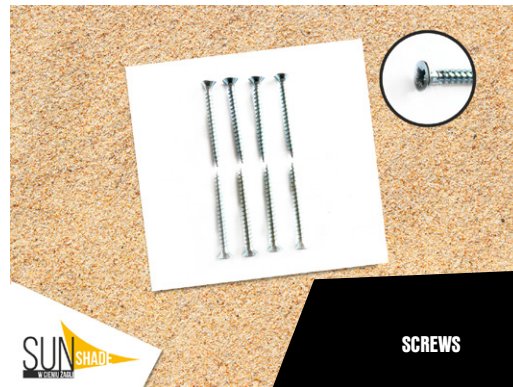

Fitting accessories:

- expander
- screws
- pad eye plate
- sail snap ring

Haven't you found a proper set?
Are you looking for a wall, metal or
another fixing?
Ask the advisor!



Quick contact phone: 518 537 385